

OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER

SECTION 23 TOWNSHIP 16 RANGE 2

DATE: 4-15-02 -- 9-13-07

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 8-8-96

IN. S.P.C. E ZONE NAD '83

NAME: 16022301

N: 508071.7282(m)

E: 46695.3966(m)

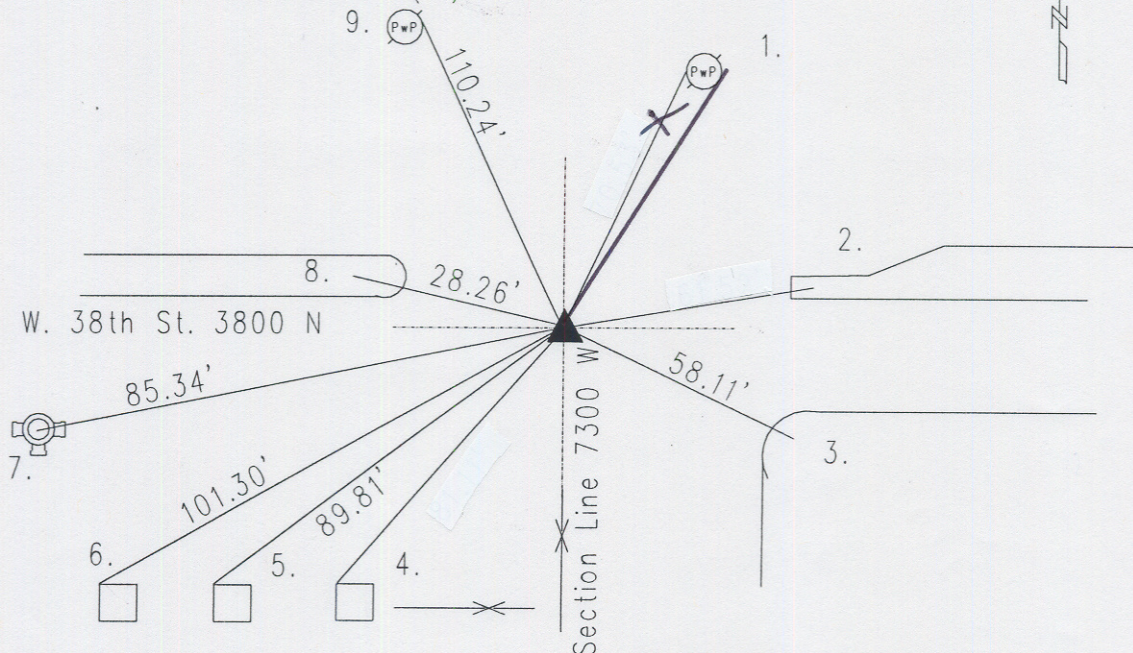

Original post set 1821 by Laughlin with witnesses: 24" ash S 87 W 24 links; 18" ash N 59 E 34 links per Marion County Atlas. Fatout surveyed this land 1884 called rock set. 5-58 Longest dug corner found stone 6" below grade. 10-19-59 Monroe dug corner called stone 6" down. Re-tied 1972 by SeFranka and called boat spike found over stone 6" down. Unknown date, Cripe called boat spike. 9-21-88 Wilcoxon dug found boat spike 2" dn. and 0.15' N of stone. Also, found railroad spike 7" down. and 0.01' S of stone. Stone found 12" down. with wooden stake S of stone. 9-21-88 Wilcoxon replaced stone with Harrison. Re-tied 8-8-96 by Wilcoxon. Re-tied 4-15-02 by Wilcoxon.

16022301

REF.	DISTANCE	DESCRIPTION
1.	70.57'	PK nail <b>E</b> PwP#84-392 A 8"up
2.	61.47'	Cut 'x' W-end of median
3.	58.11'	Cut 'x' in curb
4.	81.18'	NW corner of brick column
5.	89.81'	NW corner of brick column
6.	101.30'	NW corner of brick column
7.	85.34'	Top nut of fire hydrant
8.	28.26'	Cut 'x' E-end of median
9.	110.24'	<del>PK nail E PwP#85-392 A 12"up</del>